


**art.LVZO**

**ADJUSTABLE MOBILE SUPPORTS mod.10/40** in anodized aluminium alloy, of reduced dimensions, with nylon nut **CCN/A**.  
(article includes Supports Base **BD LVZO** and accessories)


**LVZO support assembled with Supports Base**



Fitting on mobile support  
with Supports Base below




Standard fitting on mobile support  
with Supports Base on top



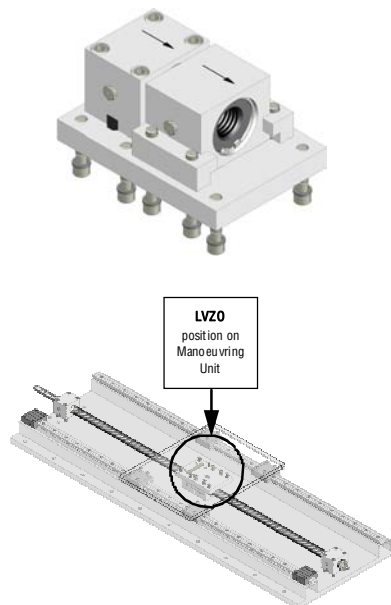


LVZO  
position on  
Manoeuvring  
Unit

**LVZO support - exploded diagram**

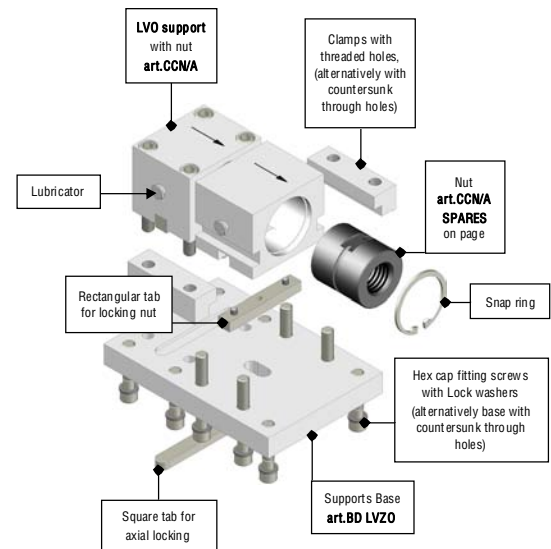

- > An aluminium plate, to fit to the machine for permanent reference, showing how to adjust the axial play is supplied the **LVZO supports** (please see page 96).
- > In cases where stain resistance is not required the LVZO support is supplied with fitting hardware and components in zinc coated steel.
- > Complete diagrams showing how to fit to the machine are on pages 101 and 103.

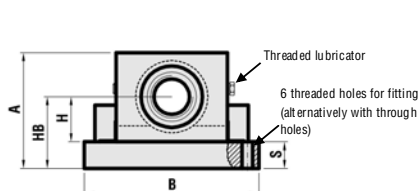

> **C = Nett size of the Base BD LVZO (see page.119)** - Support with right threaded nut available from stock.

> **Approximate weight with accessories, fitting bolts and Supports Base BD LVZO.**

| NUT<br>CCB/N | CODE<br>Dx | ARTICLE<br>Dx  | CODE<br>Sx | ARTICLE<br>Sx  | A   | B   | C<br>BD LVZO | S  | H    | HB   | F1  | F2 | F5  | Hex screws<br>for<br>fitting | Slot required<br>for fitting | Threaded<br>Lubricator | WEIGHT<br>Kg |
|--------------|------------|----------------|------------|----------------|-----|-----|--------------|----|------|------|-----|----|-----|------------------------------|------------------------------|------------------------|--------------|
| TR 10x2      | 300SM5102R | LVZO TR 10x2 R | 300SM5102L | LVZO TR 10x2 L | 41  | 75  | 100          | 12 | 15   | 27   | 59  | 34 | 50  | M6                           | Ø10x57x2                     | M6x1                   | 0,580        |
| TR 10x3      | 300SM5103R | LVZO TR 10x3 R | 300SM5103L | LVZO TR 10x3 L | 41  | 75  | 100          | 12 | 15   | 27   | 59  | 34 | 50  | M6                           | Ø10x57x2                     | M6x1                   | 0,580        |
| TR 12x3      | 300SM5123R | LVZO TR 12x3 R | 300SM5123L | LVZO TR 12x3 L | 46  | 80  | 110          | 12 | 17,5 | 29,5 | 64  | 34 | 60  | M6                           | Ø10x62x2                     | M6x1                   | 0,720        |
| TR 14x3      | 300SM5143R | LVZO TR 14x3 R | 300SM5143L | LVZO TR 14x3 L | 46  | 80  | 110          | 12 | 17,5 | 29,5 | 64  | 34 | 60  | M6                           | Ø10x62x2                     | M6x1                   | 0,720        |
| TR 14x4      | 300SM5144R | LVZO TR 14x4 R | 300SM5144L | LVZO TR 14x4 L | 46  | 80  | 110          | 12 | 17,5 | 29,5 | 64  | 34 | 60  | M6                           | Ø10x62x2                     | M6x1                   | 0,720        |
| TR 16x4      | 300SM5164R | LVZO TR 16x4 R | 300SM5164L | LVZO TR 16x4 L | 54  | 90  | 130          | 15 | 20   | 35   | 70  | 40 | 70  | M8                           | Ø12x69x3                     | 1/8G                   | 1,130        |
| TR 18x4      | 300SM5184R | LVZO TR 18x4 R | 300SM5184L | LVZO TR 18x4 L | 59  | 100 | 140          | 15 | 22,5 | 37,5 | 80  | 45 | 75  | M8                           | Ø12x74x3                     | 1/8G                   | 1,380        |
| TR 20x4      | 300SM5204R | LVZO TR 20x4 R | 300SM5204L | LVZO TR 20x4 L | 64  | 100 | 155          | 15 | 25   | 40   | 80  | 50 | 85  | M8                           | Ø12x79x3                     | 1/8G                   | 1,620        |
| TR 22x5      | 300SM5225R | LVZO TR 22x5 R | 300SM5225L | LVZO TR 22x5 L | 64  | 100 | 155          | 15 | 25   | 40   | 80  | 50 | 85  | M8                           | Ø12x79x3                     | 1/8G                   | 1,620        |
| TR 24x5      | 300SM5245R | LVZO TR 24x5 R | 300SM5245L | LVZO TR 24x5 L | 74  | 130 | 180          | 20 | 27,5 | 47,5 | 95  | 50 | 100 | M10                          | Ø14x91x4                     | 1/8G                   | 2,700        |
| TR 25x5      | 300SM5255R | LVZO TR 25x5 R | 300SM5255L | LVZO TR 25x5 L | 74  | 130 | 180          | 20 | 27,5 | 47,5 | 95  | 50 | 100 | M10                          | Ø14x91x4                     | 1/8G                   | 2,700        |
| TR 26x5      | 300SM5265R | LVZO TR 26x5 R | 300SM5265L | LVZO TR 26x5 L | 74  | 130 | 180          | 20 | 27,5 | 47,5 | 95  | 50 | 100 | M10                          | Ø14x91x4                     | 1/8G                   | 2,700        |
| TR 28x5      | 300SM5285R | LVZO TR 28x5 R | 300SM5285L | LVZO TR 28x5 L | 79  | 130 | 185          | 20 | 30   | 50   | 100 | 50 | 105 | M10                          | Ø14x96x4                     | 1/8G                   | 3,080        |
| TR 30x6      | 300SM5306R | LVZO TR 30x6 R | 300SM5306L | LVZO TR 30x6 L | 79  | 130 | 185          | 20 | 30   | 50   | 100 | 50 | 105 | M10                          | Ø14x96x4                     | 1/8G                   | 3,080        |
| TR 32x6      | 300SM5326R | LVZO TR 32x6 R | 300SM5326L | LVZO TR 32x6 L | 79  | 130 | 185          | 20 | 30   | 50   | 100 | 50 | 105 | M10                          | Ø14x96x4                     | 1/8G                   | 3,080        |
| TR 35x6      | 300SM5356R | LVZO TR 35x6 R | 300SM5356L | LVZO TR 35x6 L | 89  | 140 | 210          | 20 | 35   | 55   | 110 | 70 | 110 | M10                          | Ø14x106x4                    | 1/8G                   | 3,950        |
| TR 36x6      | 300SM5366R | LVZO TR 36x6 R | 300SM5366L | LVZO TR 36x6 L | 89  | 140 | 210          | 20 | 35   | 55   | 110 | 70 | 110 | M10                          | Ø14x106x4                    | 1/8G                   | 3,950        |
| TR 40x7      | 300SM5407R | LVZO TR 40x7 R | 300SM5407L | LVZO TR 40x7 L | 104 | 160 | 230          | 25 | 40   | 65   | 125 | 65 | 130 | M12                          | Ø16x118x4                    | 1/8G                   | 5,890        |

- > As per the diagram, the fitting clamps are supplied with threaded holes but on request they can be supplied with countersunk through holes. For the overall weight of the Group with screw please see the table on page 107.
- > To comply with safety regulations it is obligatory to use the locking tabs, the fitting hardware supplied, and ensuring that the arrows engraved in the supports are all facing in the same direction, which for vertical/oblique movements must be facing downwards.